

Specifications / Dimensions

Model Number	NRM3BI-T	NRM3AIS-T	NRM3DIS-T	NRM5BI-T	NRM5AIS-T	NRM5DIS-T
With Optional NIR	NRM3BM03-T	NRM3AMS03-T	NRM3DMS03-T	NRM5BM03-T	NRM5AMS03-T	NRM5DMS03-T
Chutes - Quantity	Primary sorting	Flat 336 mm x 3 pcs.	Flat 336 mm x 2 pcs.	Flat 336 mm x 2 pcs.	Flat 336 mm x 5 pcs.	Flat 336 mm x 3 pcs.
	Secondary sorting		Grooved 336 mm x 1 pc.	Flat 110 mm x 3 pcs.		Grooved 336 mm x 2 pcs.
	Tertiary sorting			Grooved 112 mm x 1 pc.		Flat 336 mm x 1 pc., Flat 110 mm x 1 pc.
Capacity	White rice	1.8 ~ 19.8 t/h	1.2 ~ 13.2 t/h	3.0 ~ 33.0 t/h		1.8 ~ 19.8 t/h
	Brown rice	1.8 ~ 9.9 t/h	1.2 ~ 6.6 t/h	3.0 ~ 16.5 t/h		1.8 ~ 9.9 t/h
	Wheat/Barley	1.8 ~ 9.9 t/h	1.2 ~ 6.6 t/h	3.0 ~ 16.5 t/h		1.8 ~ 9.9 t/h
RGB Cameras	6 pcs.			10 pcs.		
Light Source for RGB	LED			LED		
NIR Cameras	3 pcs.			5 pcs.		
Light Source for NIR	LED			LED		
Ejector Valves	252			420		
Ejector Pitch	4 mm			4 mm		
Air Consumption	600 – 1,500 NL/min			1,000 – 2,000 NL/min		
Compressor	5.5 – 11.0 kW			7.5 – 15.0 kW		
Power Supply	Single Phase, AC200-240V					
Operation Screen	12 inch color touch panel					
Net weight	1,020 kg			1,550 kg		
Dimension	W 1,728 mm x L 1,633 mm x H 1,720 mm			W 2,447 mm x L 1,633 mm x H 1,720 mm		


Model Number	NRM7BI-T	NRM7AIS-T	NRM7DIS-T
With Optional NIR	NRM7BM03-T	NRM7AMS03-T	NRM7DMS03-T
Chutes - Quantity	Primary sorting	Flat 336 mm x 7 pcs.	Flat 336 mm x 5 pcs.
	Secondary sorting		Grooved 336 mm x 2 pcs.
	Tertiary sorting		Grooved 336 mm x 1 pc.
Capacity	White rice	4.2 ~ 46.0 t/h	2.7 ~ 30 t/h
	Brown rice	4.2 ~ 23.0 t/h	2.7 ~ 15 t/h
	Wheat/Barley	4.2 ~ 23.0 t/h	2.7 ~ 15 t/h
RGB Cameras	14 pcs.		
Light Source for RGB	LED		
NIR Cameras	7 pcs.		
Light Source for NIR	LED		
Ejector Valves	588		
Ejector Pitch	4 mm		
Air Consumption	1,400 ~ 3,500 NL/min		
Compressor	11.0 ~ 25.0 kW		
Power Supply	Single Phase, AC 200 ~ 240 V		
Operation Screen	12 inch color touch panel		
Net weight	1,960 kg		
Dimension	W 3,106 mm x L 1,633 mm x H 1,720 mm		

* Sorting performance and capacity vary depending on variety, condition of material and initial contaminations

Full-Color RGB, NIR and Shape Sorting



NRM Series

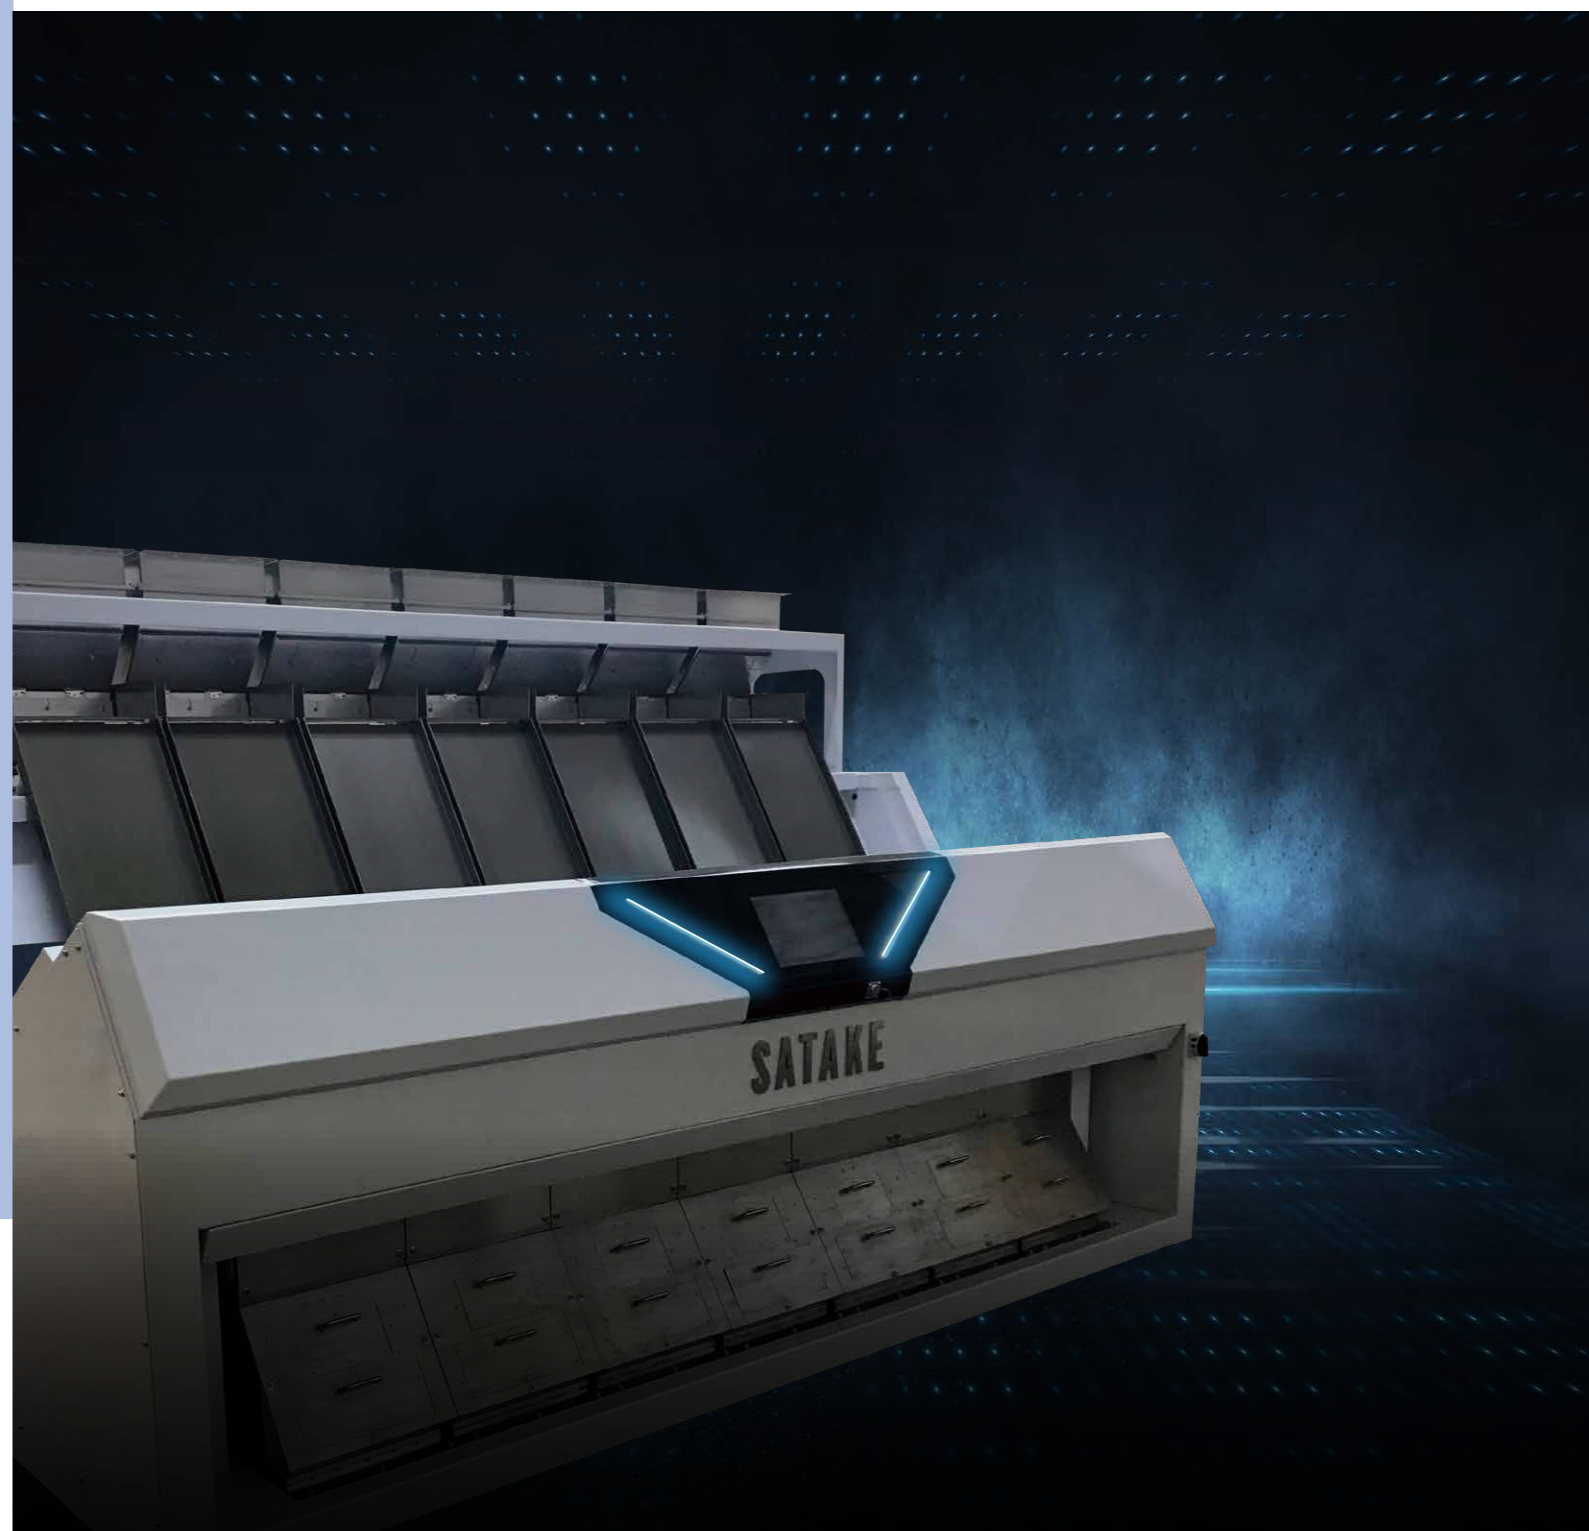


All copyright and trademark rights of this catalog belong to Satake Co., unless otherwise noted. Unauthorized copying, reprinting, etc. are forbidden. All Satake products are the subject of continuous development and, as a result, their specification may change and differ in detail from those shown.

SATAKE CORPORATION

<p>Head Office 2-30 Saijo Nishihonmachi, Higashi-Hiroshima-shi, Hiroshima-ken, 739-8602, Japan URL : https://satake-group.com</p>	<p>Korea Branch Daekyo Building, 16F, 239, Daedeok-daero, Seo-gu, Daejeon, 35229, Korea URL : https://satake-group.com</p>	<p>SATAKE USA INC. 10900 Cash Road, Stafford, Texas, 77477, U.S.A. URL : www.satake-usa.com</p>	<p>SATAKE AMERICA LATINA LTDA. Rua Xavantes, 155-Pav. 20, Bairro Atradores, CEP 89203-210, Joinville, Santa Catarina, Brazil URL : www.satake.com.br</p>	<p>SATAKE EUROPE LTD. Horsfield Way, Bredbury Industrial Park, Bredbury, Stockport, Cheshire, SK6 2SU, U.K. URL : www.satake-europe.com</p>
<p>SATAKE INDIA ENGINEERING PVT. LTD. 4th Floor, Tower-1, HB Twin Towers, A2, 3, 4, Netaji Subhash Place, Wazirpur District Centre, New Delhi, 110034, India URL : www.satakeindia.com</p>	<p>SATAKE (THAILAND) CO., LTD. 133,134 Moo 5, Bangkadi, Mueang Pathum Thani, Pathum Thani 12000, Thailand URL : www.satake-th.com</p>	<p>SATAKE ASIA CO., LTD. 888/84 Mahatun Plaza Bld., 8th Floor, Ploenchit Rd., Lumpini, Pathumwan, Bangkok, 10330, Thailand URL : www.satake-th.com</p>	<p>PT. SATAKE GOBEL INDONESIA Gedung Surabaya Bumi Mandiri, Lantai 9, Jalan Jenderal Basuki Rachmat Nomor 129-137, Unit 905 B, Indonesia URL : https://satake-group.com</p>	<p>SATAKE VIETNAM CO., LTD. Copac Square 12 Ton Dan street, Floor 3A, Ward 13, District 4, HCMC, Vietnam URL : https://satakevietnam.com</p>
<p>SATAKE MANUFACTURING (SUZHOU) CO., LTD. 229 Jin Feng Road, Suzhou New District, Suzhou City, Jiangsu Province, 215129, China URL : www.satake.cn</p>	<p>SATAKE AUSTRALIA PTY. LTD. 15 Leland Street, Penrith, N.S.W., 2750, Australia URL : www.satake.com.au</p>	<p>ISO 9001 Certification (Quality Management Systems)</p> <p>ISO 14001 Certification (Environmental Management Systems)</p> <p>SATAKE CORPORATION has obtained ISO9001 and ISO14001 certification. These international standards for management systems ensure Satake will continue to provide high quality products and services.</p>		


The *Ultimate* Solution in Optical Sorting

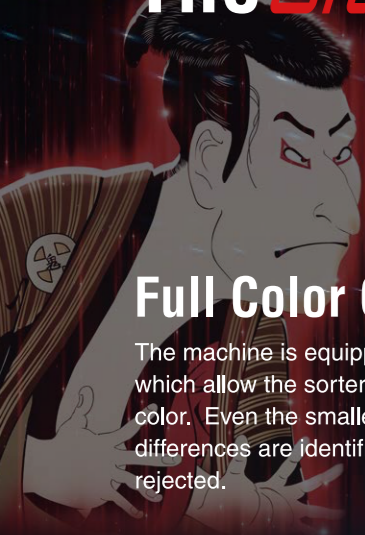

NIRAMI, Satake's brand new full color optical sorter has arrived. Offering the ultimate solution in optical sorting, NIRAMI is sure to fulfill your sorting needs. A distinctive posture seen in the classical Japanese drama of Kabuki, NIRAMI means "to look intensely".

Full Color Cameras

The machine is equipped with Japan's latest full color cameras which allow the sorter to match the eye's ability to see true color. Even the smallest color differences are identified and rejected.

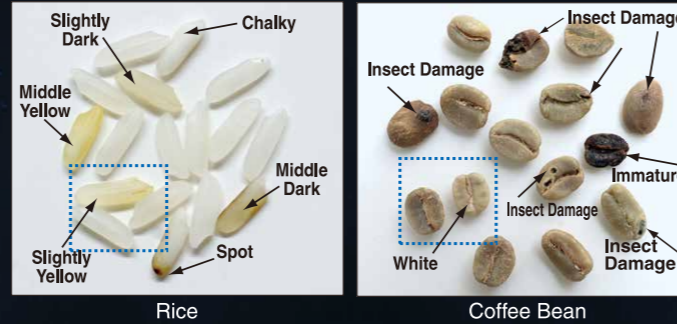

Near Infrared (NIR) Camera

The NIR camera detects inorganic foreign material such as stones, plastic, glass and other items that have a similar color to the accept product. Impurities such as glass, plastic and stones which have the same color as the accept material cannot always be detected by a full color camera. Featuring both NIR high technology camera and RGB full color cameras the NIRAMI has the ability to detect and remove foreign materials.



Shape Recognition


Shape recognition technology enables the machine to sort the material by shape (such as broken or adhered) which conventional color sorters could not achieve.

*Sorting performance varies depending on variety, size and contamination of material.



Advanced 3S Software


The 12 inch touch screen is designed for easy use. The user-friendly interface with simple icons and images provides intuitive operation of the machine. The advanced software evaluates the product application and automatically creates the sensitivity for accurate defect removal.

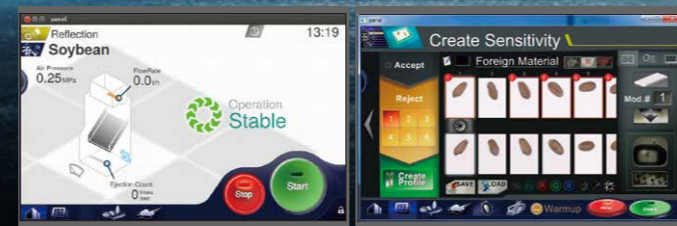

Remote Panel Control

optional service

Optional remote access via secure internet connection allowing the flexibility to monitor performance and provide diagnostic support.

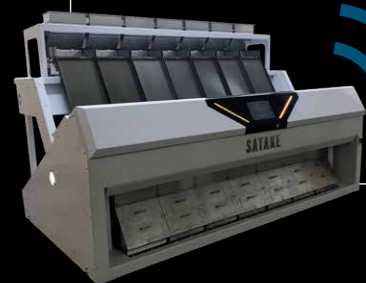

Easy Clean



The open type body enables easy access to the cleaning positions.

Sort Various Materials

The machine serves the latest requirements for sorting rice, lentils, beans, cereals and nuts etc.



High Sorting Capacity



3 to 7 extra-wide chutes (sorting modules) to suit all capacity requirements.

LED Operation Indicator



An LED operation indicator on the front of the NIRAMI allows operators to see the machine status at a glance.

Tertiary Sorting



Precise sorting is achieved with a three stage sorting system. Rejects from the primary sort can be resorted twice, within one unit, to maximise the reject concentration.

